


Optical Data Transmission Device

CFW SERIES

Small size, light weight & middle distance (50m & 80m)

This is smaller size and lighter weight than BWF series
 This is a middle distance type Serial Data Transmission Device with 50m and 80m.
 I/O signal with max.128 points can be transmitted with exclusive serial/parallel converter, ISP-A1C-C(16 points per unit).

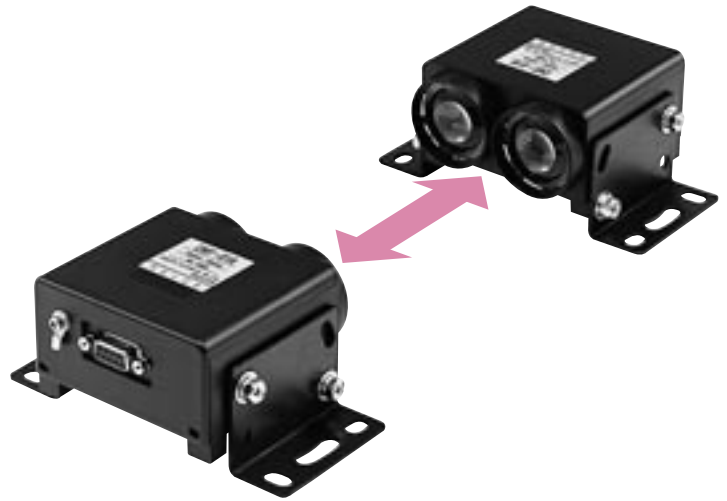

Specifications

Type	Serial type							
Model No.	CFW-01A	CFW-01B	CFW-11A	CFW-11B	CFW-02A	CFW-02B	CFW-12A	CFW-12B
Transmission distance	50m		80m		50m		80m	
Directional angle	± 2°							
Power source	24VDC(± 10%)		12 to 24VDC (10 to 30VDC)		24VDC(± 10%)		12 to 24VDC (10 to 30VDC)	
Current consumption	160mA(DC12V)/80mA(DC24V)							
Transmission method	Full duplex two-way transmission							
Transmission speed	DC to 19,200bps				DC to 9,600bps			
Interface	RS-422				RS-232C			
Modulating method	FSK modulation							
Modulating frequency	Type A(transmission 5.5MHz, reception 6.0MHz), Type B(transmission 6.0MHz, reception 5.5MHz)							
Connection	9-pin D-sub connector							
Ambient temperature/humidity	-10 to +50 , 85%RH or less (Not icing)							
Ambient illuminance	Halogen incandescent lamp: 20,000lux or less							
Noise resistance	Impulse noise simulator, pulse width 1 μs, 100ns Repeated cycle 100Hz Normal mode 1,000V Common mode 500V							
Protective structure	IP60(IEC standard)							
Warning output(ARM)	ON when light-receiving level margin 1.5 times or more, Photo-coupler, open-collector 35V, 50mA							
Case material	ABS resin(Cover: Polycarbonate)							
Weight	Approx. 240g							

System structure

