



THIS DOCUMENT IS THE PROPERTY OF MOFLON TECHNOLOGY (SHENZHEN) LTD. (HEREAFTER "MOFLON"). IT IS LENT AND IS TO BE RETURNED UPON REQUEST. THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO MOFLON. THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIZED PERSON COPIED OR PUBLISHED WITHOUT MOFLON PRIOR WRITTEN CONSENT.  
COPY RIGHT @ 2013 MOFLON TECHNOLOGY



MARK	ECN NO.	Modify	Approve	DATE

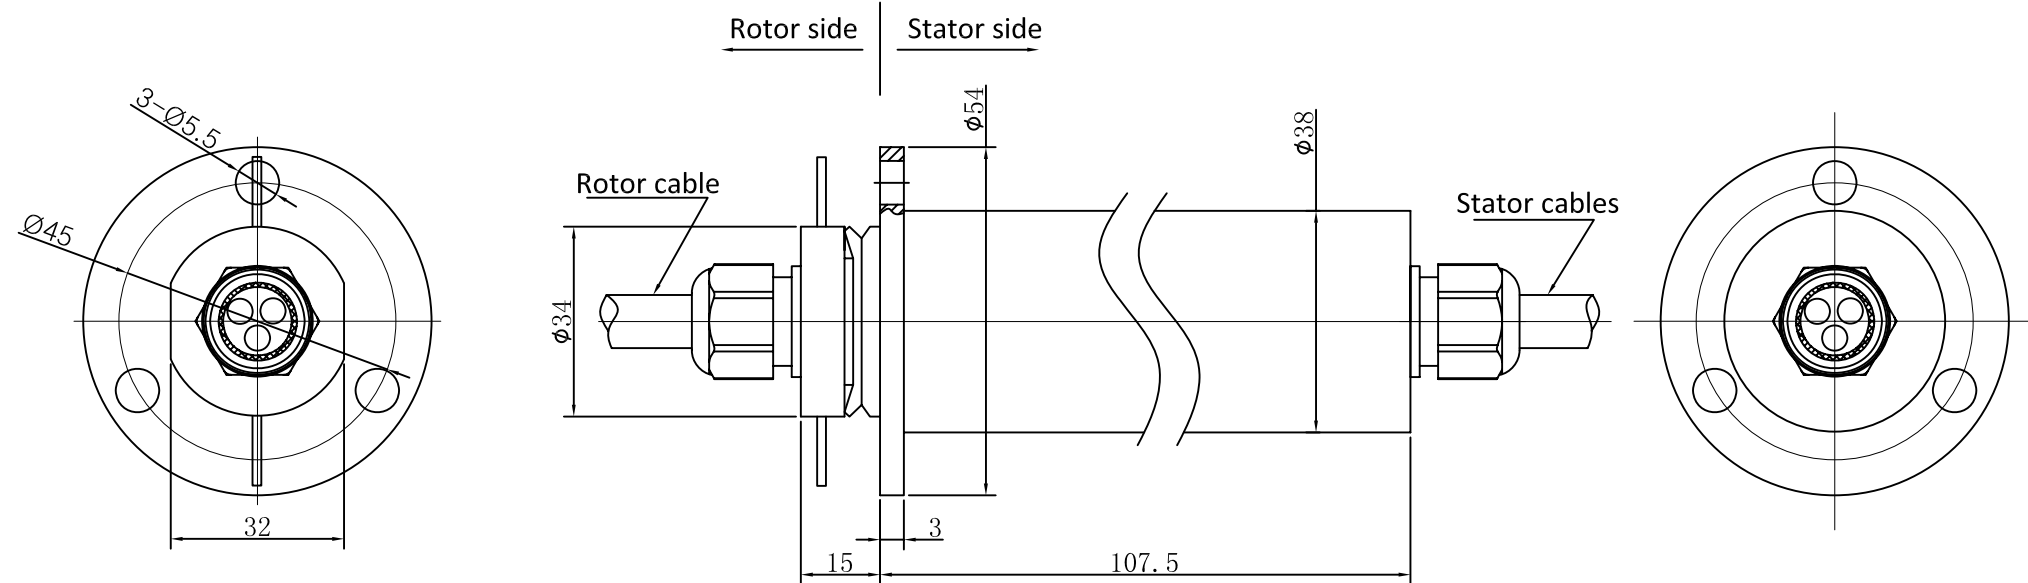

6 X20A or signal

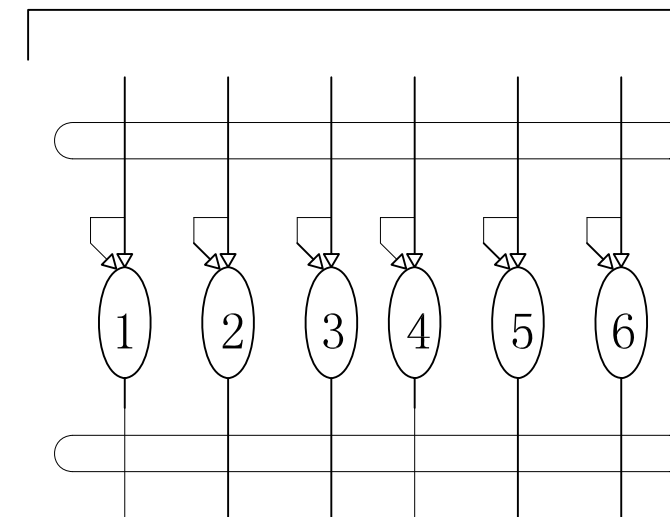

### Electronic Specification

1	Rings	6	2	Current	6rings, max 20A/ring
3	Voltage	600VAC/VDC			
4	Insulation Resistance	800MΩ@800VDC			
5	Electrical noise	Max.5mΩ;			
6	Dielectric strength	600VAC@50Hz;			

### Mecchanical Specification

8	Speed	0~600RPM;	9	Torque	Max.0.1 N.M;
10	Life	120,000,000 Revolutions, strongly depends on your working conditions			

### Environmental adaptability

11	Working temperature	-40℃~+80℃	12	Storage temperature	-45℃~+85℃
13	humidity	85±3%(30℃+5℃)	14	Vibration	10~30HZ Frequency, Double amplitude 0.8mm 30~200HZ Frequency, Acceleration 2g, two Circulation total 30min.
15	Rush	40g, 11ms, Half sine wave, Vertical direction 3 times, Level 3times			
16	IP Class	IP68(sealed 300m under water)			

### Materal/Attachment

17	Contact Material	Gold-Gold	18	Housing material	AL Alloy
19	Lead wire	Stator:Power module:300mm waterproof cable Rotor:Power module:300mm waterproof cable			

UNLESS OTHERWISE SPECIFIED		TOLERANCES (EXCEPT AS NOTED)		6 rings, max 20A(signal)/ring	
1.ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES & DEBURR		DECIMAL X±.1 XX±.03 XXX±.005		MODEL MG03806-IP68	
2.MATERIAL&FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT		FRACTIONAL ±1/16		SIZE A	
FILLETS R.015	FINISH	ANGULAR ±1°		R E V. A / 0	
THIRD ANGLE PROJECTION		DWG.NO F020201		SCALE 1:1	
		DATE		UNIT mm	

**MOFLON**