

MODEL VL12, 22, 32

NEW VIBRATION LEVEL SENSOR



Feature

- New principle of operation and probe construction (Patent)
- Fail safe switch is provided
- Withstand up to 150°C (180°C in option)
- Less subject to build up and dead stock

Operational Description (Patent Principle and Construction)

The vibration rod of new VL series is constructed by using the electro magnet and the permanent magnet. When the electro magnet is energized, the electro magnet and permanent magnet are attracted and repulsed. This movement makes vibration.

The construction of vibration probe is similar to the motor. When the motor is energized by the battery, the back electromotive current is generated by the influence of permanent magnet and coil. When the vibration rod is covered with solids or powdered material, the current flowing to the lead wire is increased by damping of the back electromotive current. The amplifier detects the shifting of current level, and converts to output signal.

General Description

Model VL is designed to detect powders, solids, granular material including such very light powders as instant coffee, powdered milk, iron oxide, and toner for use in medium and/or large sized hopper. There are several versions available to meet a variety of hopper/silo operations. Model VL12, standard type, is used for high and low level detection. For low level detection in large silos, model VL12-G is available with a protected shield to protect from the lateral load on the probe. Model VL22, pipe extension type, is suitable for high or low alarm in large silos with top mounting. Pipe extension up to 2500mm for Plug mounting and 4000mm for Flange mounting are available. Model VL32, cable extension type, is also suitable for high or low alarm with a flexible PVC coated cable available in length up to 6000mm.

Ordering Information

VL12	Standard
VL22	Pipe Extension
VL32	Cable Extension
	N Plug mounting
	F Flange mounting
	G Flange with protective shield, only available VL12G
	(Null) Standard: Max. 150°C
	T High temperature Max. 180°C for VL12 & VL22
	0 Flat-face flange
	1 Raised-face flange
	4 Plug mounting
	J JIS flange
	A ANSI flange
	D DIN flange
	G G plug
	R R plug
	T NPT plug
	S 304 stainless steel
	S6 316 stainless steel
	A 100-120/200-240V AC, 50/60Hz
	D 24V (20 to 30V) DC
	G G3/4
	T with NPT 3/4 socket

VL12	N		4	R	S	A	G	= VL12N-4RSAG
------	---	--	---	---	---	---	---	---------------

* The mounting size should be specified when you order.


* The length of probe should be specified in mm if required.

Specifications

Model	VL12N	VL12F	VL22N	VL22F	VL32F
Description	Standard		Pipe Extension		Cable Extension
Drawing					
Measuring Object	Powder, Granular material, Pellets and Underwater sediments				
Mounting	R1	JIS5K50A	R1-1/4	JIS5K50A	JIS5K50A
Supply Power	100 to 120V AC, 200 to 240V AC 50/60Hz				
Power Consumption	Approx. 5VA or 3W Max.				
Relay Output	1 SPDT, 250V 3A AC, 30V 3A DC (Resistive) C-NO: Normally Open contact C-NC: Normally Closed contact				
Detection Time Delay	Approx. 3 to 5 seconds for covered Approx. 3 to 5 seconds for free				
Operating Temperature	Housing	-20 to 60°C			Vibration rod
		-20 to 150°C (180°C option)			-20 to 70°C
Maximum Pressure	2 MPa (Except a mounting part)				1 kPa
Concentrated load	0.55 kN Max. (at the tip of detection pipe)				
Maximum Humidity	95% RH				
Sensitivity	Bulk density of 0.2g/cm ³ Min.				
Vibration Frequency	Approx. 300 to 500Hz				
Material	Housing	ADC12			Vibration rod
		304SS*			Extension
					PVC
Cable Entry	G3/4				
Protection	Housing	IP65			IP65
	Vibration rod	IP68			IP65
Fail safe	High or Low by switch				
Indication	Green LED for Power status Red LED for Relay status				

*The material of 316SS is optionally available.

Wiring

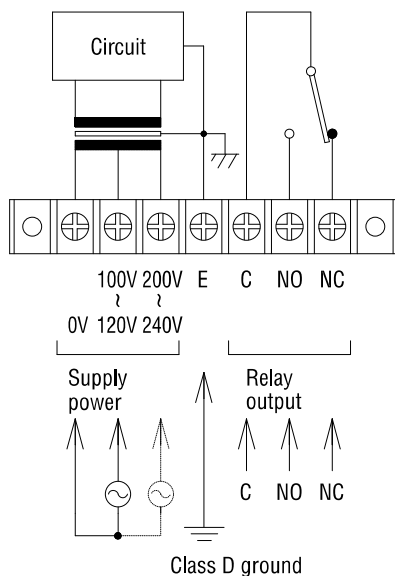

Description of Fail-safe Function

Fail-safe mode	LAMP		Relay contact
	DETECTION	POWER	
H.ON			
L.ON			
H.ON			
L.ON			
POWER OFF			