

MT024 Series

Through bore 25.4mm, Overall Diameter: 68mm

MT024 series provides a 25.4mm through-bore for routing of hydraulic or pneumatic lines or hydraulic or pneumatic rotating shaft installation, and a compact 68mm outside diameter, features long life, fiber brush contact technology for ultimate performance in many challenging applications.

MT024 series are standard, off-the-shelf products, Color-coded lead wires are used on both the stator and rotor for simplified electrical connections. It can transmit signal(2A), 10A current at max 250VAC/VDC



Specifications

Specifications			
Rings	2~12(see table as below)	Current	Signal,5A
Voltage	250 VDC/VAC	Max speed	250RPM
Through bore size	25.40mm	Overall diameter	68mm
Housing Material	Aluminium Alloy	Torque	0.05N.m; +0.03N.m/6rings
Working life	depends on speed	Contact material	Precious Metal:Gold-Gold
Electrical noise	<5mOhm	Contact Resistance	<2mOhm
Dielectric strength	600VDC@50Hz	Lead Wire	UL Teflon® Awg22
Insulation resistance	1000MΩ@600VDC	Lead Lengths	300mm(12")
Operating Temp.	-40°C to 80°C	Protection	IP51
Mechanical vibratio	MIL-SID-810E	Humidity	10% to 70% RH
Materials	Lead Free,RoHS compliant	Certified	YES

Parts#

PART #	TOTAL RINGS	CURRENT	LENGTH
MT02402	2	(Signal or Power 5A)/ring	30mm
MT02404	3	(Signal or Power 5A)/ring	36mm
MT02406	6	(Signal or Power 5A)/ring	42mm
MT02412	12	(Signal or Power 5A)/ring	60mm


Lead wire Color codes

Rings#	Color Code	Rings#	Color Code	Rings#	Color Code
1	BLK	5	YEL	9	GRY
2	BRN	6	GRN	10	WHT
3	RED	7	BLU	11	PINK
4	ORN	8	PURPLE	12	AZURY

12 wires for one group color. from 13 ... 24, repeat the same color as 1 ... 12, indicated with number code pipe.

Drawings

Standard drawings:

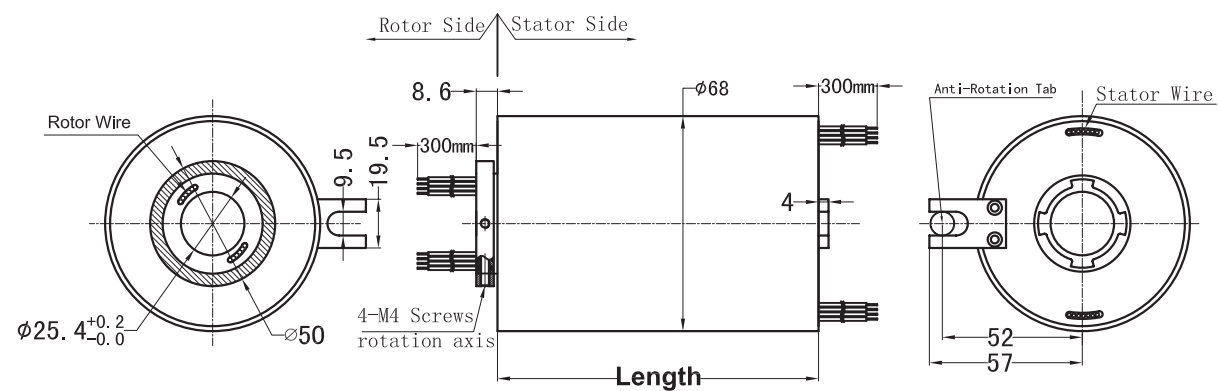

MT024