

MUSB2252 - MUSB SERIES

MUSB2252 (USB slip rings)

2 channel USB2.0 + 1~22 circuits Power/signal

MUSB2252, support 2 channel USB2.0 slip rings, with through bore size 25.4mm (1"), overall diameter 86mm, are standard, off-the-shelf, Color-coded lead wires are used on both the stator and rotor for simplified electrical connections.

PART# Explanation:

MUSB2252 - P0610 - S06

S06: signal/5A each @ 6 circuits

P0610: 10A each @ 6 circuits



Specifications

PART #	OD *L	SIGNAL/2A	10A	20A	USB
MUSB2252-S04	86mm*72mm	4	0	0	2
MUSB2252-P0410	86mm*72mm	0	4	0	2
MUSB2252-P0420	86mm*80mm	0	0	4	2
MUSB2252-S10	86mm*96mm	10	0	0	2
MUSB2252-P0210-S08	86mm*96mm	8	2	0	2
MUSB2252-P0610-S04	86mm*96mm	4	6	0	2
MUSB2252-S16	86mm*120mm	16	0	0	2
MUSB2252-P1610	86mm*120mm	0	0	0	2
MUSB2252-P0410-S12	86mm*120mm	12	4	0	2
MUSB2252-P0810-S08	86mm*120mm	8	8	0	2
MUSB2252-S22	86mm*144mm	16	0	0	2
MUSB2252-P0410-S18	86mm*144mm	18	4	0	2
MUSB2252-P2210	86mm*144mm	0	22	0	2

USB Specifications

USB	USB1.0,USB2.0	connectors	rotor: male, stator: male
BER	10E-11	Insert loss	2db

Power/signal Specifications

Circuits	1-22 (see table as above)	Current	Signal(2A),10A, Multiple 10A
Voltage	440 VDC/VAC	Max speed	500RPM
Through bore size	25.4mm(1")	Overall diameter	86mm(3.38")
Housing Material	Aluminium Alloy	Contact material	0.8N.m
Working life	150million revolutions	Torque	Precious Metal:Gold-Gold
Electrical noise	<10 milliohms	Contact Resistance	<100mOhm(AWG16#,300mm)
Dielectric strength	300VDC@50Hz	Lead Wire	UL Teflon®
Insulation resistance	1000MΩ@600VDC	Lead Lengths	250mm
Operating Temp.	-40°C to 80°C	Protection	IP51
Mechanical vibration	MIL-SID-810E	Humidity	10% to 90% RH
Materials	Lead Free,RoHS compliant	CE Certified	YES

MUSB2252 - MUSB SERIES


Notes: 10A rings parallel can be used as multiple 10A large current.

For Example: 3 rings parallel = 1 wires 30A, please see order instructions

- 1)The operational life of the unit is dependent upon rotational speed, environment and temperature.
- 2)Lead Wire size: 2A/signal -> AWG22, 10A -> AWG16, 20A -> Awg14, colored code.
- 3)Electrical noise is dependent upon the rotating speed and current,voltage.

Drawings

Standard drawings:

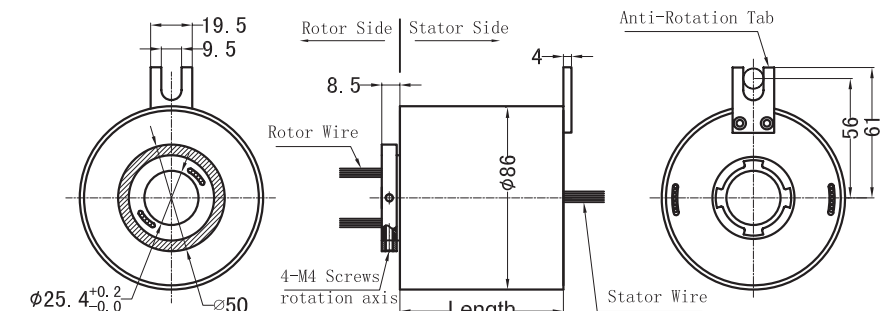

MUSB2252

12 wires for one group color. from 13 ... 24, repeat the same color as 1 ... 12, indicated with number code pipe.

Lead wire Color codes


Rings#	Color Code	Rings#	Color Code	Rings#	Color Code
1	BLK	5	YEL	9	GRY
2	BRN	6	GRN	10	WHT
3	RED	7	BLU	11	PINK
4	ORN	8	PURPLE	12	AZURY

Optional Flanges mounting:

At sometimes, we need a different flange for mounting instead, how should we do?

Great! Moflon supply flange style as below:

(when you order, pls add FL01 at the suffix of Part#, for example: MUSB2252-S06-FL01 means MUSB2252-S06 with optional flange FL01.)

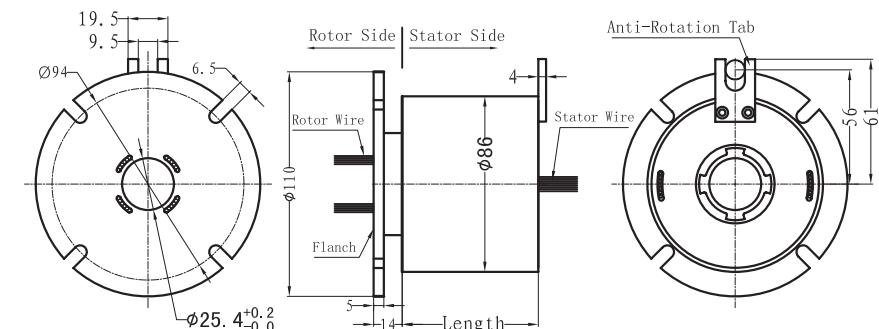

Suffix -FL01



MUSB2252 - MUSB SERIES


Options

- ▶ Can combine more wires:1-96Ring
- ▶ Specified connectors and Heat-shrink tube.
- ▶ Longer lead lengths available.
- ▶ Shielded cables
- ▶ Connectors
- ▶ Frequencies up to 500 MHz
- ▶ High-speed data transmission for fast Ethernet and EtherCat
- ▶ Signal, Coax, and Power combinations
- ▶ Thermocouples
- ▶ Shock, Vibration, and Temperature Qualified
- ▶ Pneumatic/Hydraulic Capability
- ▶ High temperature---up to 450 degree
- ▶ High Voltage & large Current(1000A)
- ▶ Military Grade.

Build On Request

how to build on request?

Please see ordering information instructions as below :

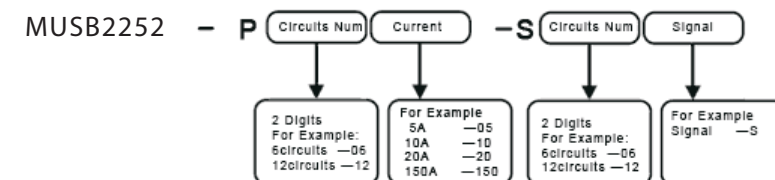

For example:

- ▶ if order MUSB2252 with 6wires*signal,the model should be **MUSB2252-S06**.
- ▶ if order MUSB2252 with 12wires*signal + 3wires*10A,the model should be **MUSB2252-P0310-S12**
- ▶ if you have other optional requirements,such as lead wire length,connectors,military grade, Please descrip in your email.