


THIS DOCUMENT IS THE PROPERTY OF MOFLON TECHNOLOGY (SHENZHEN) LTD. (HEREAFTER "MOFLON"). IT IS LENT AND IS TO BE RETURNED UPON REQUEST. THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO MOFLON. THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIZED PERSON COPIED OR PUBLISHED WITHOUT MOFLON PRIOR WRITTEN CONSENT.
COPY RIGHT @ 2013 MOFLON TECHNOLOGY

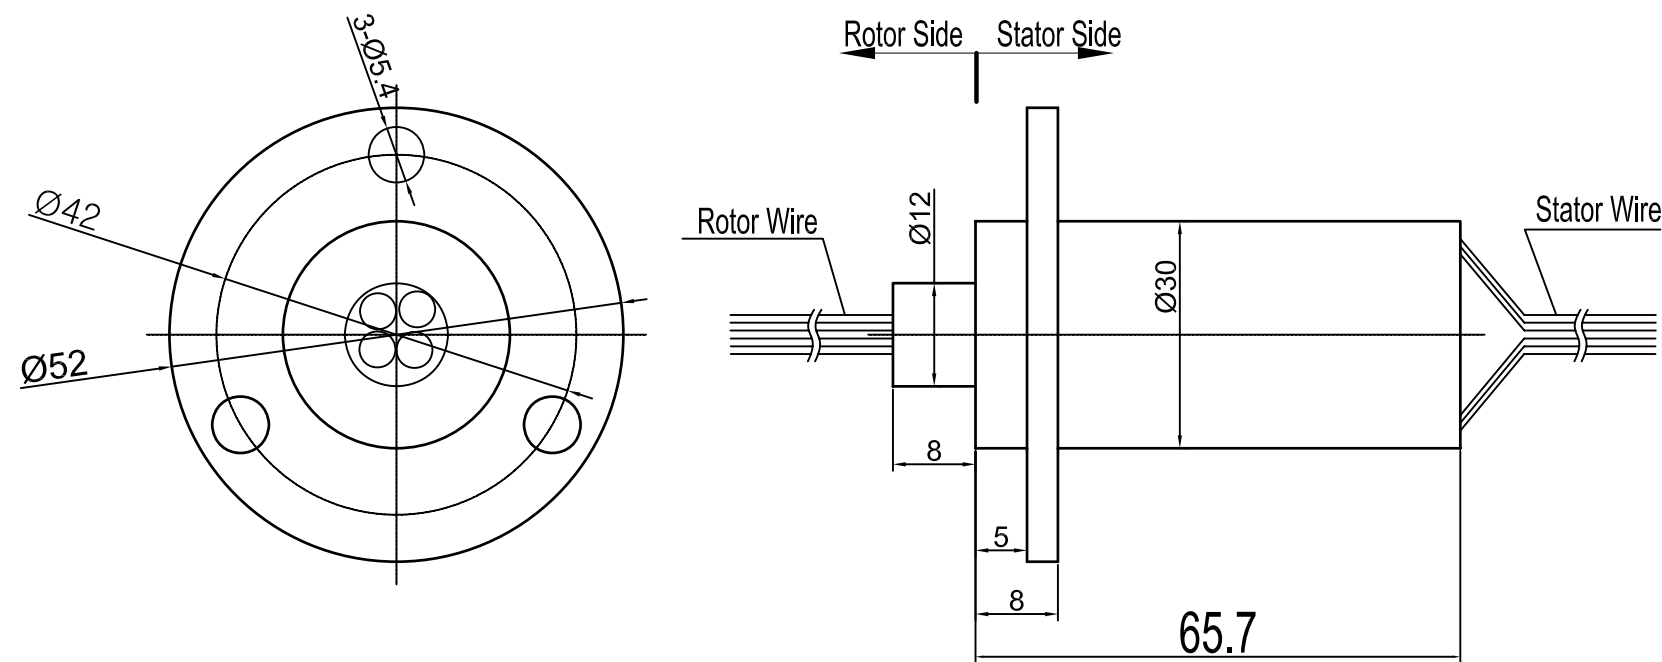

Electrical Parameter	Power Module	4 wires * 30A UL Teflon® AWG12
	Signal Module	-- --
	Rating Voltage	400V
	Lead Wire Length	Stator: 300mm Rotor: 300mm
	Dielectric Strength	≥1000V@50Hz between each circuit
	Insulation Resistance	1000MΩ@600VDC
	Electric Noise	Max 5mΩ@6VDC,50mA (Runing with 100rpm)
Mechanical Parameter	Bearing	Steel bearing
	Working Speed	250RPM
	Inner Diameter	Solid,capsule style
	Inner Material	Engineering plastic
Other	Contacting Material	GOLD-GOLD
	Housing Material	ABS plastic
Other	Protection (IP Grade)	IP54
	Working Temperature	-40°C+80°C

Lead Wire Color Codes

Rings#	Color Code	Rings#	Color Code	Rings#	Color Code
1	BLACK				
2	WHITE				
3	GREEN				
4	RED				

4WIRES * 30A each				TYPE	Outline	UNIT	mm
DESIGN		DATE		PART#	MW1430	SCALE	1:1
CHECKED		DATE		MOFLON			
PROJ.		REV.	A/0				