



 **ravioli** SpA



ISO 9001: 2000
RAVI 9105

D.C. Contactors for Electrical Traction - TECNO Series

D.C. Contactors

TECNO Series

Main features of the range

The TECNO series contactors' range, compact but powerful, has been designed to be suitable for the traction and material handling fields using direct current.

Such contactors can be applied to lift trucks, industrial cleaning machines, various services on board of ships and boats, as well as to road and rail transport vehicles.

Coils

The d.c. coils feature terminals with 6 mm connections for the TECNO 6 series and screw connections for the TECNO 4 series.

Standard duty is :

- for T 106, T 206 intermittent mode (80 %)
- for T 154, T 204 intermittent mode (80 %)
- for T 106 C , T 206 C intermittent mode (50%) with maximum working time of 15 minutes (temporary duty).

Normalized voltage is : 12 - 24 - 36 V

Different types are available as follows : reduced consumption coils for continuous duty - **option P** .

Integral protection

The cover is completely protected from oil, water and dust.

Main contacts

The contactors have silver alloy double breaking contacts, resistant to arc, suitable for heavy duty.

The TECNO 6 Series is formed also by contactors with main contacts 1 NO and 1 NO+1 NC ; further it is possible to provide a motor reverser that includes both the d.c. contactors 1 NO+1 NC with the electrical connections.

The NC contacts are not suitable for making or breaking current.


Correct use of the motor reverser


The used contactors have fast drop-out time (8 msec) and relatively long pull-in times (approx. 25 msec).

In this way, safe reversals can be carried out the risk of the contacts being closed at the same time.

The use of suppressor diodes, however, increases drop-out time, and therefore it is important to choose the most suitable type of suppressor (diode+resistor).

Diagrams of functioning

The lines  represent the links supplied with the motor reverser.



Changing of nominal opening current based on U_e voltage

Types	U_e	12 o 24V	36V
T-106 T-106C (1 NO)	I_e	120A	75A
T-154	I_e	150A	90A
T-206 T-206C (1 NO)	I_e	180A	100A
T-204	I_e	180A	100A



D.C. Contactors



TECNO 6 Series - T 106

PERFORMANCES



Contactor		T-106	T-106 P	T-106 C
Nominal operating current at 50% intermittent duty, 300 op/h)	I_e	120A	120A	120A
Thermal current rating, permanent duty	I_{th}	80A	80A	80A
Nominal voltage	U_e	12V 24V	12V 24V	12V 24V
Breaking capacity with 15 ms time constant		480A	480A	480A
Category of usage		DC5	DC5	DC5
Working voltage limits		0,7-1,1Vn	0,85-1,1Vn	0,7-1,1Vn
Coil power dissipation		12W	8W	22W
Operating time	pull-in time	30ms	30ms	25ms
	drop-out time	10ms	10ms	8ms
Max. torque at terminal board		6 Nm	6 Nm	6 Nm
Mechanical life	op.n.	2×10^6	2×10^6	2×10^6
Main contacts		1NO	1NO	1NO 1NC
Codes		E T106AX	E T106PX	E T106CX

The numeric suffix identifying voltage is as follows:



Voltage (V)	12	24	36
Suffix (X)	1	2	3



T 106



T 106C

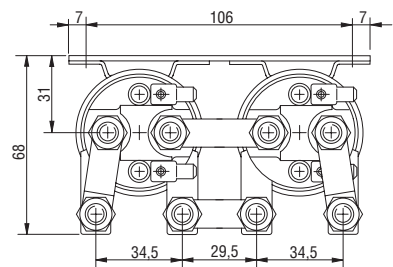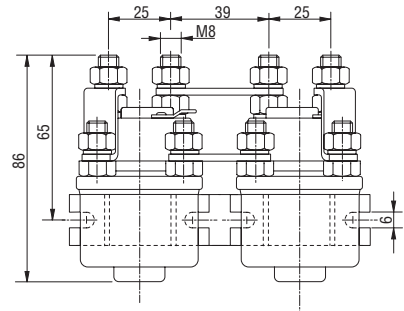

2T 106C

D.C. Contactors


TECNO 6 Series - T 206

PERFORMANCES


Contactor		T-206	T-206 C
Nominal operating current at 50% intermittent duty, 300 op/h	I_e	180A	180A
Thermal current rating, permanent duty	I_{th}	150A	150A
Nominal voltage	U_e	12V 24V	12V 24V
Breaking capacity with 15 ms time constant		720A	720A
Category of usage (for NO contact)		DC5	DC5
Working voltage limits		0,7-1,1Vn	0,7-1,1Vn
Coil power dissipation		20W	22W
Operating time	pull-in time	30ms	25ms
	drop-out time	10ms	8ms
Max. torque at terminal board		6 Nm	6 Nm
Mechanical life	op n	2×10^6	2×10^6
Main contacts		1NO	1NO 1NC
Codes		E T206AX	E T206CX

The numeric suffix identifying voltage is as follows:


Voltage (V)	12	24	36
Suffix (X)	1	2	3

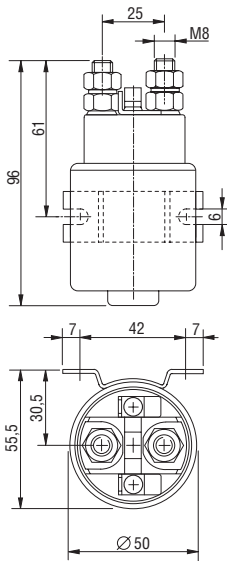

T 206

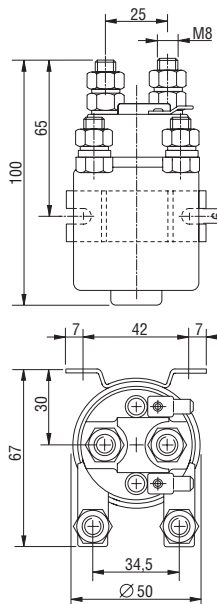

T 206C

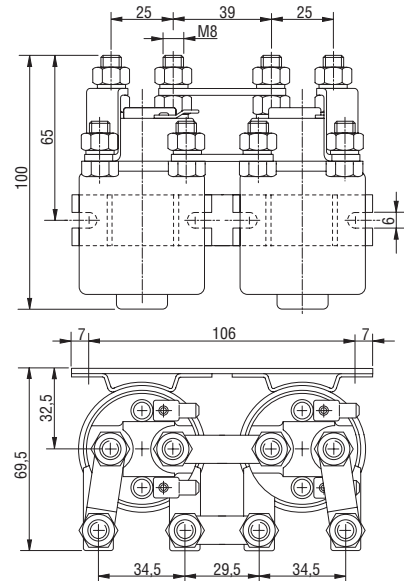


2T 206C

D.C. Contactors

TECNO 4 Series - T 154 - T 204

Main features

All the contactors in the TECNO series are suitable for the traction and industrial material handling sectors using direct current, and are often used on lift trucks, industrial cleaning machines, duty on board ships and boats as well as road and rail transport vehicles. The TECNO 4 series of contactors described here has been designed for heavy duty and strict conditions such for example in the presence of prolonged or high rush currents. The TECNO 4 series coils feature screw connections.

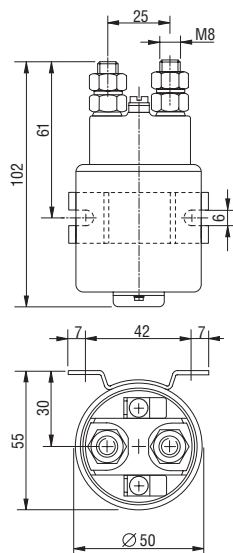

T 154 - T 204

PERFORMANCES

Contactor		T-154	T-204
Nominal operating current at 50% intermittent duty, 300 op/h	I_e	150A	180A
Thermal current rating, permanent duty	I_{th}	100A	150A
Nominal voltage	U_e	12V 24V	12V 24V
Breaking capacity with 15 ms. time constant		600A	720A
Category of usage		DC5	DC5
Working voltage limits		0,7-1,1Vn	0,7-1,1Vn
Coil power dissipation		22W	22W
Operating time	pull-in time	45ms	45ms
	drop-out time	10ms	10ms
Max. torque at terminal board		6 Nm	6 Nm
Mechanical life	op n	2×10^6	2×10^6
Main contacts		1NO	1NO
Codes		E T154AX	E T204AX

The numeric suffix identifying voltage is as follows:

Voltage (V)	12	24	36
Suffix (X)	1	2	3

For Your Safety

The range of TECNO series comply with the current safety rules, and in particular:

- 98/37/EC Machine Directive
- 2006/95/EC Low Voltage Directive
- 2004/108/EC EMC Directive
- 2002/95/EC RoHS
- UNI EN 1175-1 Safety of industrial trucks
- CEI EN 60947-4-1 Low voltage switch gear and control gear
- CEI EN 61000-6-4 EMC Emission
- CEI EN 61000-6-2 EMC Immunity

Guaranteed Quality Product

The range of TECNO series contactors is guaranteed by our EC Certificate of Conformity, available upon request, in which it is declared that such product was created by RAVIOLI in accordance to defined and recognised Safety Regulations, and in compliance with the Quality standards stated in our UNI EN ISO 9001:2000 Quality System Certificate.



Installation and cabling instructions

The TECNO contactors must be installed by a qualified staff, according to current safety law. Electrical current must be switched off before wiring.

For better loss of heat use proof cables according to the usage current.

Assure that the terminal power cables are locked with nut at max clamps torque of 6 Nm.

The NC contacts are not suitable for making or breaking current

The assembling can be made by the bracket.

Recommended working positions : either horizontal or vertical with poles set upwards.

Operating Temperature -25°C+40°C

RAVIOLI declines any responsibility for damage deriving from incorrect installation or improper use of the product.

The Range



Consult our catalogues
7.1 - 7.2 - 7.3 - 7.4