



SLIP RING  
**SC 040**

## FACTS

- 2 ... 6 rings
- 2 ... 15 A per ring
- max. 240 V<sub>AC</sub>
- Flat pin connector for sockets 6,3 mm or 2,8 mm
- Outer diameter 40 mm





SC040-03/02-M08

## ELECTRICAL DATA

Number of rings:	2 ... 6 (15 A max. per ring)
Voltage:	max. 240 V <sub>AC</sub>
Test voltage:	500 V <sub>AC</sub>
Insulation resistance:	1000 M Ω at 500 V <sub>DC</sub>
Noise:	60 m Ω at 5 min <sup>-1</sup> , 6 V <sub>DC</sub> and 50 m A
Contacts / Leads:	gold-gold

## MECHANICAL DATA

Speed:	max. 250 min <sup>-1</sup>
Protection class:	IP 65 (connector IP 00)
Temperature:	-20 °C ... +80 °C (-5 °F ... +175 °F)
Rotor / Stator conn.:	flat pin connectors for socket (mating connectors included)
Bearings:	ball bearings of steel
Gasket:	ring gasket of FPM
Housing:	aluminium anodized
Length:	L <sub>1</sub> /L <sub>2</sub> on request

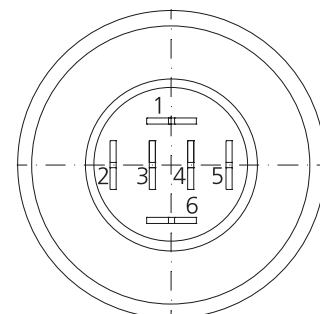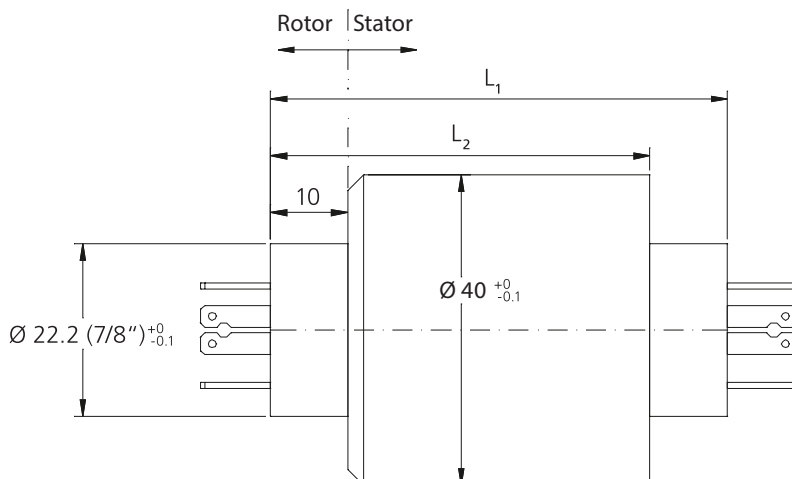



SLIP RING

SC 040

LTN

## ORdeR In FORMAt IOn

Type of slip ring.

S	C	0	4	0
---	---	---	---	---

No. of rings with:

max. 2 A

max. 10 A


**İMAJ TEKNİK ELEKTRİK ELEKTRONİK MALZEMELERİ SAN. VE TİC. LTD. ŞTİ.**  
Emekyemez Mah.Yüksek Minare Sk. No:8 / 17 80020 Karaköy / İstanbul  
T.: +90 212 235 95 35 / 36 F.: +90 212 235 95 37 info@imajteknik.com  
[www.imajteknik.com](http://www.imajteknik.com) - [www.imajteknik.com.tr](http://www.imajteknik.com.tr)

