




SLIP RING  
**SC 104**

## FACTS

- 6, 12, 18 or 24 rings for max. 10 A
- 500 V<sub>AC</sub> per ring
- Outer diameter 104 mm
- Hollow shaft diameter 50 mm
- Max. 400 min<sup>-1</sup>

The system is maintenance free for up to 50 million rotations (depending on rotation speed and environmental conditions).

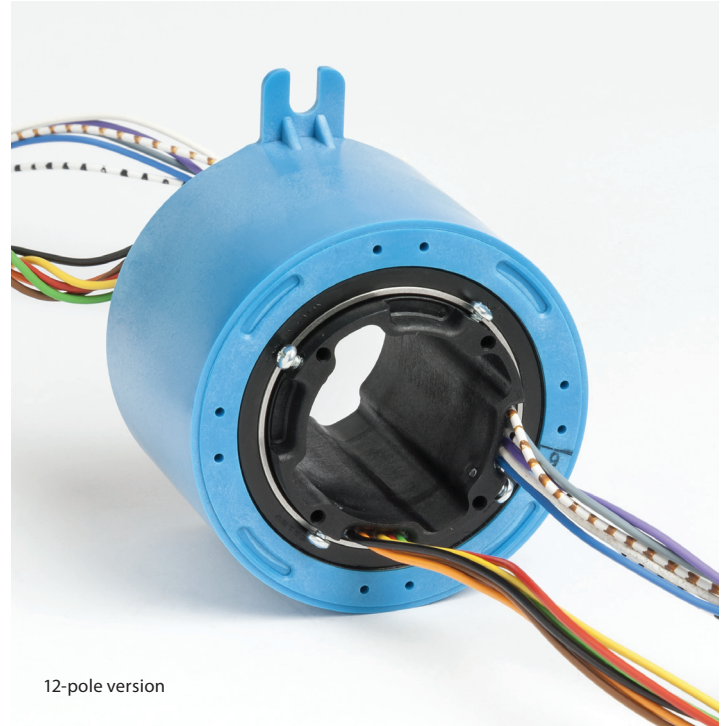


12-pole version

## ELECTRICAL DATA

Number of rings:	6, 12, 18 or 24
Current:	max. 10 A per ring
Voltage:	500 V ~ EN60664-1 (V DE0110)
Test Voltage:	1500 V <sub>AC</sub> (60 Hz) between all rings
Insulation resistance:	1000 M Ω at 500 V <sub>DC</sub>
Noise:	20 m Ω at 5 min <sup>-1</sup>

## MECHANICAL DATA

Speed:	max. 400 min <sup>-1</sup>
Protection class:	IP 54
Temperature:	-40 °C ... +80 °C (-40 °F ... +176 °F)
Connection:	1000 mm leads; AWG 16 - leads (1,23 mm <sup>2</sup> ) PVC
Bearings:	precision steel ball bearings with seals
Housing:	fibre-reinforced plastics

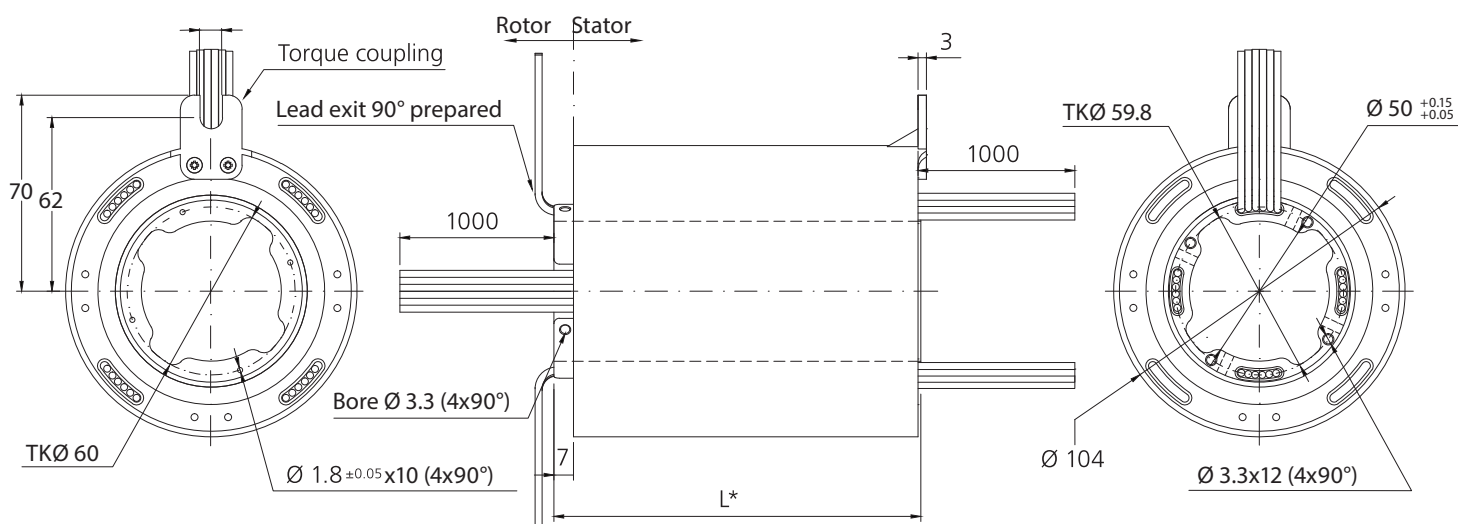

Number of rings	6	12	18	24
L* (mm)	59	83	107	131




SLIP RING  
SC 104

LTN


## Accessories on request

- Adapter for slip ring S C020 sc
- shaft bushing (inner diameter: 1,5" / 38,1 mm)

\* Extension by slip ring S C020 for additional channels, rotational speed max. 250 min<sup>-1</sup> (see data sheet S C020).

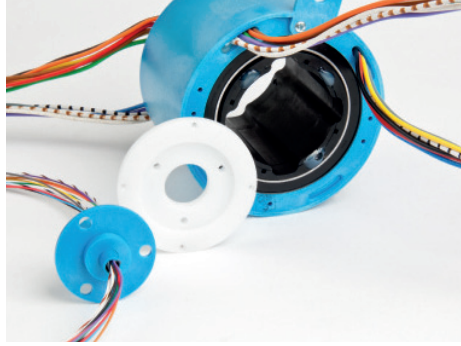


\*Combination with slip ring S C020

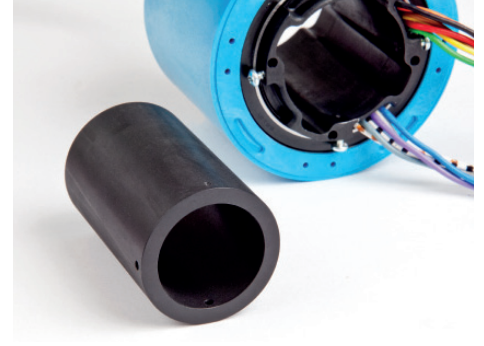


Shaft bushing (smaller inner diameter)


## VARIANTS

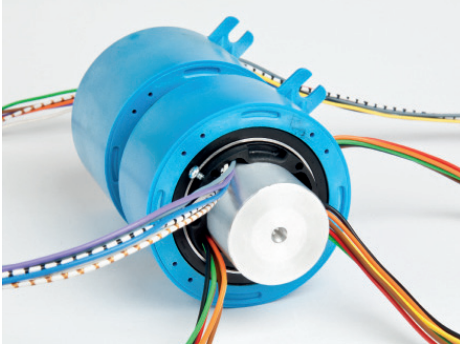

Combination 2 systems S C104

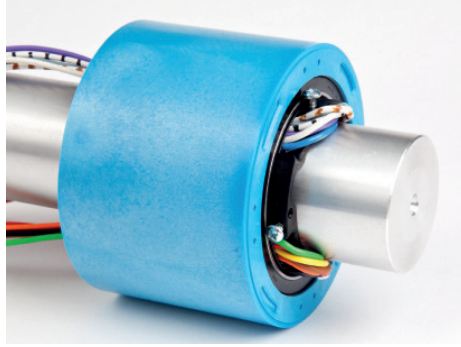

Cable led out one-sided

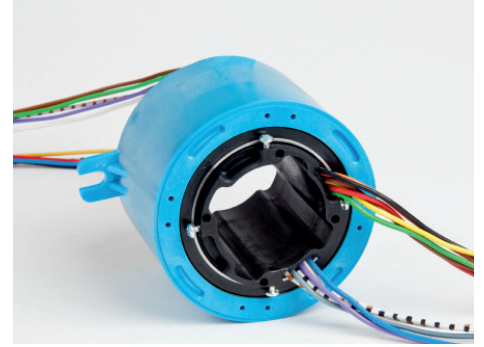

Torque arm shifted by 90°

The SC104 is a standard slip ring with exceptionally durable industrial bearings. With additional slots for axial cable routings, it can be applied modularly as combination of up to three 12-pole-systems with 36 rings max. The torque support can be placed at the front or back side of the housing and with flexibility of 90°. All models are equipped with 1 meter lead wires, lead exit optionally on one side of the housing - to turn them on 0°, 90°, 180° and 270°.

**İMAJ TEKNİK ELEKTRİK ELEKTRONİK MALZEMELERİ SAN. VE TİC. LTD. ŞTİ.**

Emekyemez Mah. Yüksek Minare Sk. No:8 / 17 80020 Karaköy / İstanbul  
T.: +90 212 235 95 35 / 36 F.: +90 212 235 95 37 info@imajteknik.com

[www.imajteknik.com](http://www.imajteknik.com) - [www.imajteknik.com.tr](http://www.imajteknik.com.tr)

