


SLI 125CH

SL-series plug-in relay

Main features

- Solid state input relay
- cULus Listed, CE (EMC and LVD)
- Integrated status LED
- Used with mechanical limit switches and also with long signal cables
- Internal transient protection in input side

Functional block diagram

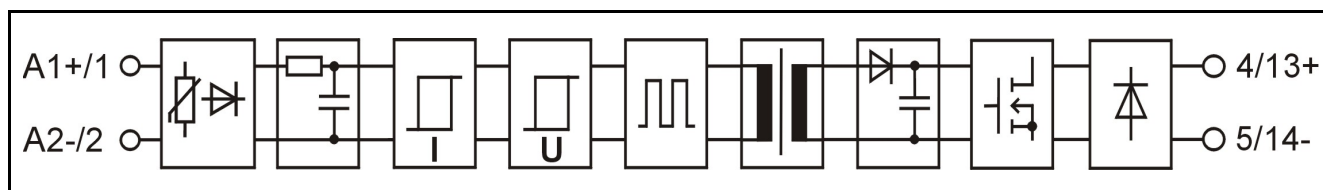

Main specifications

Breakdown voltage I/O	minimum	4300	VAC rms
Air/creepage distances I/O	minimum	8	mm
Capacitance I/O	typical	3	pF
Material of the casing	PBT	UL 94V-0	
Colour of the casing	White		
Weight	typical	40	g
Temperature range:			
Storage	range	-40...+70	°C
Operation	range	-25...+70	°C

Electrical specifications ($T_A = 25\text{ °C}$)

Primary				Secondary			
Input voltage	nominal	110...125	VDC	Load voltage	minimum	0	VDC
	typical	4	mA		maximum	60	VDC
Input current at nominal voltage	maximum	4,2	mA	Load current	maximum	50	mA
	minimum	95	VDC	Voltage drop at max. load	typical	0,2	V
Input voltage range (abs.)	maximum	140	VDC		maximum	0,4	V
	Input impedance	typical	31	k Ω	Switch-on delay	typical	0,3
typical		80	VDC	maximum		0,5	ms
Switch-on voltage	maximum	95	VDC	Switch-off delay	typical	0,3	ms
	typical	60	VDC		maximum	0,5	ms
Switch-off voltage	minimum	50	VDC	Leakage current (off-state)	maximum	1	μ A

Ambient temperature (T_A) means the temperature immediate in vicinity of relays, where the air flow meets the relays.

Temperature limitations

Ambient temperature (T_A)	Limitations
-25 °C...+40 °C	No limitations
+40 °C...+55 °C	Only every other relay should be in on-state when assembled side by side.
+55 °C...+70 °C	If relays are most of the time on, there should be a gap in both sides at least 12,5 mm. In multichannel mounting bases every other place should be empty.

Derating when switching inductive loads

This relay is meant for PLC inputs and similar loads. A clamp diode with the load must be used when switching inductive loads.

Fusing

To protect relay against short circuit and overload a fast fuse with the correct rating for the load and the capacity of the relay should be chosen. Note that when overload current is not large it is possible that the fuse will not protect the relay because of the tolerance on the fuse rating.

Assembling

Can be assembled to all MIS 1... -mounting sockets and all MB/MBS 8/16... -mounting bases. Fixing with a captive screw.

