



PROTECTIVE BAND CV

Stainless steel cover CV (width 10 mm, thickness 0,3 mm) for magnetic band MP protection is glued on magnetic band (excluding MP100)



PROTECTIVE SUPPORT SP

Aluminium protective support SP for magnetic band MP protection. Fixed on machine surface and holds magnetic band. It is not possible to use the support SP if the magnetic band is already covered by stainless steel band CV.



MAGNETIC BAND MODIFICATIONS

MAGNETIC BAND	MP100	MP200/MP200Z	MP500/MP500Z
Pole pitch	1+1 mm	2+2 mm	5+5 mm
Reference mark position	-	on request from left or right at pitch - es of 4 mm or multiples	on request from left or right at pitch - es of 10 mm or multiples
	Note: With MP100 magnetic band, it is not possible to use any protective cover (CV or SP)	Note: Magnetic bang MP200Z is used only with reading head xMTMxxxZ	Note: Magnetic bang MP500Z is used only with reading head xMTMxxxZ

COLOR OF CABLE WIRES AND OUTPUT SIGNALS

	MT-F		MT-AV	
Green	U1	a=0,25T±0,125T	A	A and B amplitude 0,6 V...1,2 V (~ 1V)
White	U2		B	R amplitude 0,25...0,6V (useful part)
Red	(5...28)V		(5...28)V	A and B phase shift 90 °±10° el.
Blue	0V		0V	Reference voltage U0 2,5 V
Brown	U0		R	Amplitudes of signals are referred to measurement made with 120 Ω impedance
Orange	U1		A	and power supply voltage of reading head 5V±5%.
Light-blue	U2		B	
Yellow	U0		R	
Shield	Shield		Shield	

ACCESSORIES

CONNECTORS FOR CABLE	B12 12-pin round connector	C12 12-pin round connector	D9 9-pin flat connector	D15 15-pin flat connector	RS10 10-pin round connector	ONC 10-pin round connector
DIGITAL READOUT DEVICES	CS3000			CS5500		

ORDER FORM

READING HEAD VERSION:	OUTPUT SIGNALS AND RESOLUTION:	REFERENCE MARKS:	MAGNETIC BAND:	PROTECTIVE STEEL COVER:	OR ALUMINIUM PROTECTIVE SUPPORT:	EXTERNAL REFERENCE MARK ACTUATOR SME:	CABLE LENGTH:	CONNECTOR TYPE:
P - MTP M - MTM H - MTH	AV - Sine wave F05 - 0,5µm F10 - 1,0µm F50 - 5,0µm F100 - 10,0µm F250 - 25,0µm F500 - 50,0µm F1000 - 100,0µm F5000 - 500,0µm F10000 - 1000,0µm	C - standard, without reference mark; E - with external reference mark actuator; Z/L - made on magnetic band by order at any place. L- distance in mm from begin of ML	MP100/01 - 1m ... MP200/01 - 1m ... MP200Z/01 - 1m ... MP500/01 - 1m ... (20 m max for MP500)	W - without CV AV/01 - 1m AV/02 - 2m AV/03 - 3m ...	W - without SP SP/01 - 1m SP/02 - 2m SP/03 - 3m ...	0 - without SME 1- with SME	01 - 1m 02 - 2m 03 - 3m ...	W - without connector B12 - round, 12 pins D9 - flat, 9 pins D15 - flat, 15 pins RS10 - round, 10 pins ONC - round, 10 pins
ORDER EXAMPLE:	1) MTM-F100-C-MP200/03- SP/03-0-02/W							

MAIN EXPORT COUNTRIES:



The company under the name “Precizika Metrology” began work after the change of name of the Lithuanian - American Joint Venture “Brown & Sharpe - Precizika”. The company has a proud history of old traditions in the leadership of design and production of metrological equipment. Its workforce has been involved for over fifty years in the supply of measuring technology and systems to automate factories as well as in the development of optical scale manufacturing technology.

In 2000, the production process was certified to fully meeting the requirements of EN ISO 9002:1994, in 2003 – EN ISO 9001:2000.

The company’s goal is to consistently supply high quality products and services to meet customer demands on a timely basis. The company’s main products are linear and angular glass scale gratings, and the linear and rotary displacement measuring systems.

JSC “Precizika Metrology” represents worldwide known companies and suppliers of measuring equipment, CNC centers, executes installation and services of them, trains the users, and executes upgrading of used CMM and manual cutting machine-tools.

MT

MAGNETIC LINEAR ENCODER



Non contact magnetic linear encoder MT has measuring length up to 50 m. The encoder is used to convert linear displacements of key machine components into electrical signals containing information about the value and direction of the displacement. Encoder consists of metal based magnetic band MP, reading head and protective steel cover CV. The length of magnetic band could be up to 50 m. Encoder could be supplied with external zero signal actuator (magnet), which allows usage one of many reference marks made on magnetic band. Zero signal actuator is not necessary in the case when the magnetic band with reference marks made according customer requirements (MP200Z) is used. Encoder also could be supplied with protective aluminium support SP (instead protective cover CV), which is mounted on machine for magnetic band protection. The encoder has two versions of output signals:

- MT-F - Square-wave signals, with integrated subdividing electronics for interpolation.
- MT-AV - Sinusoidal signals, with amplitude approx. 1 Vpp, which require external subdividing electronics.



Žirmūnų str. 139, LT-09120 Vilnius, Lithuania
sales@precizika.lt
Tel.: +370 (5) 236 3683
Fax.: 370 (5) 236 3609
www.precizika.lt

MT

RECOMMENDED APPLICATIONS




ROBOTICS



PACKAGING



RETROFITTING



COORDINATE MEASURING MASHINES



FACTORY AUTOMATION



TURNING MACHINES & CENTERS





AUTOMOTIVE INDUSTRY



MAINTENANCE

MECHANICAL DATA

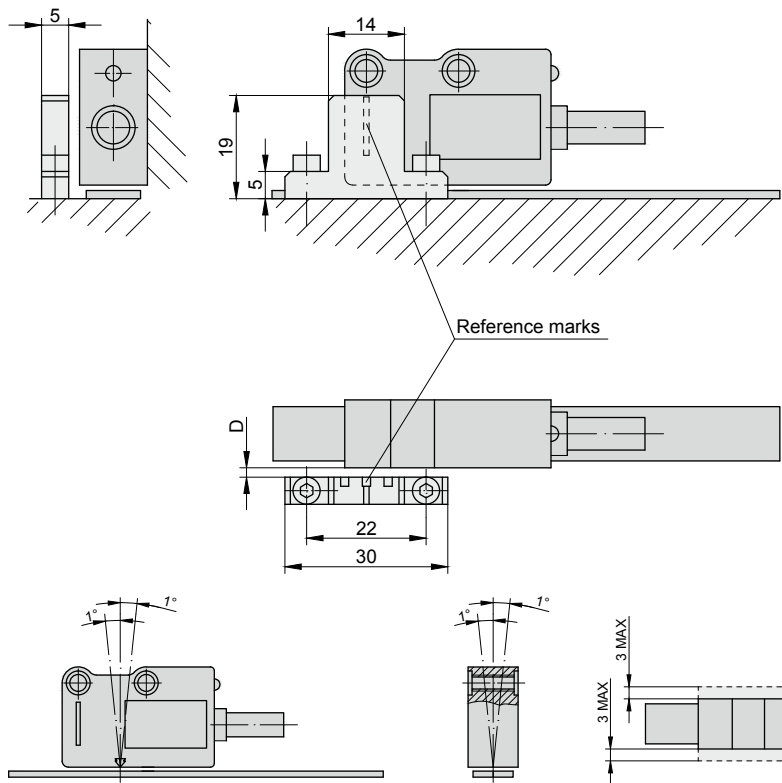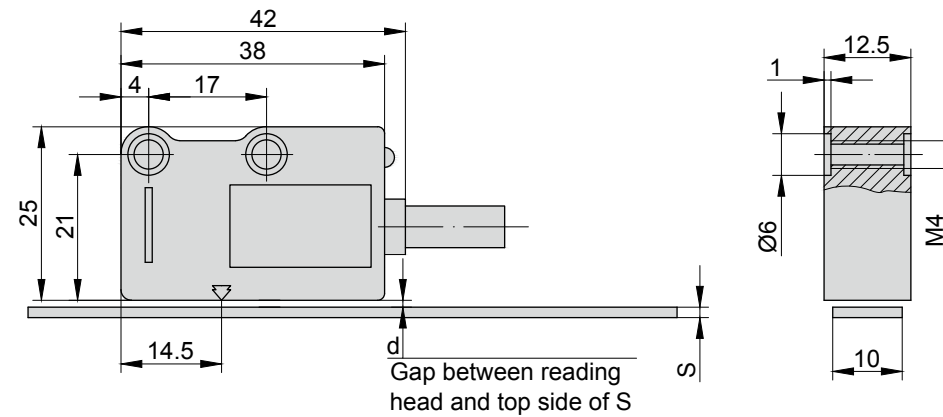

	MPx00	MPx00+CV	MPx00+SP
S(MM)	1.3	1.6	2.1
d(MM) MT P	0.1 ÷ 0.5	-	-
d(MM) MT M	0.3 ÷ 1.5	1.2 MAX	0.7 MAX
d(MM) MT H	0.3 ÷ 3.5	3.2 MAX	2.7 MAX

	D(MM)	
MTP (MP100)	2 nom.	3 MAX
MTM (MP200)	1.5 nom.	2.5 MAX
MTH (MP500)	1 nom.	2 MAX

MT-F PARAMETERS

Measuring length (ML)	up to 50 m (max. 20 m with MP500)
Repeatability	±1 increment
Max. measuring frequency	300 kHz
Power supply	(5 ... 28) DC ±5%, V
Current consumption without load	60 mA max.
Current consumption with load	140 max. (with 5V and R=120Ω); 115 max (with 12V and R=1.2kΩ) ; 90 max (with 28V and R=1.2kΩ), mA
Phase shift between signals	90° ±5°
Protection (IEC 529)	IP67
Operating temperature	0...+50 °C
Storage temperature	20...+80 °C
Permissible humidity	100% non-condensing
Permissible vibration (55...2000 Hz)	300 m/s ²
Permissible shock (11 ms)	1000 m/s ²
Output signal shape	Square-wave TTL pulses
Output signals	6 - two main + one zero signal and their complementary
Output scheme	Line driver (TTL optional)
Weight of reading head	40 g
Standard cable length	2.0 m
Max. cable length of head	10.0 m
Max. cable length of encoder (2 m of head + adapter)	100.0 m
Electrical protections	from inversion of power supply polarity; from short circuit on output port

READING HEAD MODIFICATIONS

READING HEAD	MTP-F	MTM-F	MTH-F
Reference (zero) signal *	Constant pitch every 1 mm (version C)	Constant pitch every 2 mm (version C) With external actuator (version E) Reference marks made on magnetic band according customer requirements (version Z)	Constant pitch every 2 mm (version C) With external actuator (version E) Reference marks made on magnetic band according customer requirements (version Z)
Pole pitch	1+1 mm	2+2 mm	5+5 mm
Accuracy **	±10 µm	±15 µm	±20 µm
Resolution (after x4 in CNC)	0,5; 1; 5; 10 µm	5; 10; 25; 50; 100; 500; 1000 µm	5; 10; 25; 50; 100 µm
Max. traversing speed	0.6 (MTP-F05); 1,2 (MTP-F10) m/s	1.2 (MTM-F10); 12 (MTM-F100) m/s	6 (MTM-F50); 12 (MTM-F100) m/s

*Version C - without reference signal
Version E - zero signal is generated when external zero actuator acts to reference mark, which is made on magnetic band. It is possible to use several actuators.
Version Z - zero signal is generated when reference mark is acted by actuator incorporated into reading head.
**The smaller is the gap between reading head and magnetic band the better is accuracy of encoder.

Note: For heavy working conditions the special version of encoder is available (see data sheet for models CMT and PCMT).

MT - AV

Measuring length (ML)	up to 50 m (20 m with MP500)
Repeatability	±1 increment
Max. traversing speed	12 m/s
Power supply	(5 ... 28) DC ±5%, V
Current consumption without load	90 mA max.
Current consumption with load	110 mA max. (for 5V and R=120Ω)
ØPhase shift between signals	90° ±5°
Protection (IEC 529)	IP67
Operating temperature	0...+50 °C
Storage temperature	-20...+80 °C
Permissible humidity	100% non-condensing
Permissible vibration (10...2000 Hz)	300 m/s ²
Permissible shock (11 ms)	1000 m/s ²
Output signal shape	Sine-wave
Output signals	Two main + one zero (square-wave pulse)
Output scheme	Line driver; TTL
Weight of reading head	40 g
Standard cable length	2.0 m
Max. cable length of head	10.0 m
Max. cable length of encoder (2 m of head + adapter)	100.0 m
Electrical protections	from inversion of power supply polarity; from short circuit on output port

READING HEAD MODIFICATIONS

READING HEAD	MTP-AV	MTM-AV	MTH-AV
Reference (zero) signal	Constant pitch every 1 mm (version C)	Constant pitch every 2 mm (version C) With external actuator (version E) Reference marks made on magnetic band according customer requirements (version Z)	Constant pitch every 2 mm (version C) With external actuator (version E) Reference marks made on magnetic band according customer requirements (version Z)
Pole pitch	1+1 mm	2+2 mm	5+5 mm
Accuracy	±10 µm	±15 µm	±20 µm
Resolution (depending on external interpolator)	up to 0,1 µm	up to 0,5 µm	up to 1 µm
Max. measuring frequency	12 kHz	6 kHz	2.4 kHz

MAGNETIC BAND

Accuracy (at 20 °C)	±30 (standard); ±15 (optional) µm/m
Width	10 mm
Thickness	1.3 mm
Length	50 m max. (20 m max.- for MP 500)
Thermal expansion coefficient	10,5 x 10 ⁻⁶ °C ⁻¹ (at 20 °C±0,1 °C)
Bend radius	130 mm min.
Weight of magnetic band	65 g/m
Weight of protective cover	25 g/m
Operating temperature	0...+70 °C
Storage temperature	-20...+80 °C